
Mobile phone Monitor User's Manual

1. Configuration of mobile phone monitor functions in client side (Embedded DVR)

1.1 Setup device at first, then type in user name and password to log in on the device preview screen.

1.2 Shown as the figure V1-1 below, click 【Net】 and then click 【NextPage】 to enter into screen of 【Mobile port】.



Fig.V1-1: Screen of DVR network configuration

1.3 Shown as the figure V1-2 below, modify port, the default port number of mobile phone is 7050.

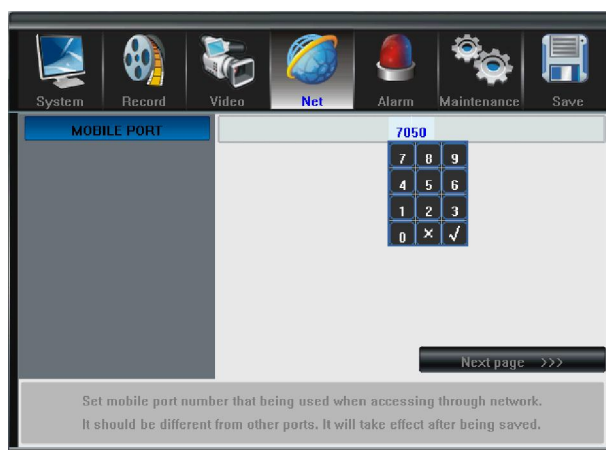


Fig.V1-2: Screen of DVR mobile phone port configuration

1.4 Right click mouse or click **【 Save】** to save and exit.

1.5 Shown as the figure V1-3 below, click **【 Record】** and then select **【 ON】** in the sub menu of **【 Sub Code】** column.

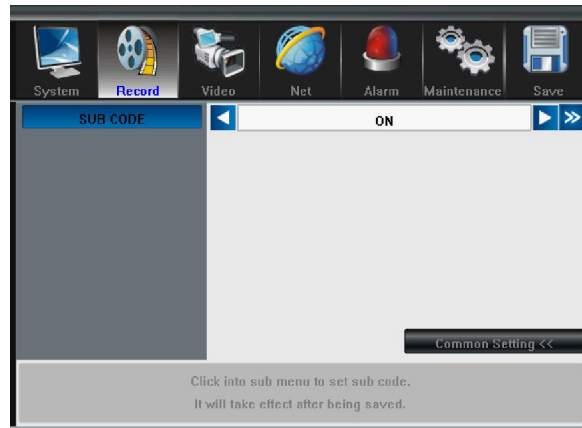


Fig.V1-3: Screen of DVR sub stream configuration

1.6 Shown as the figure V1-4 below to set **【 FPS】** and **【 Bitrate】**, the frequently-used frame rate is 3 fps, and data bit 128 kbps.

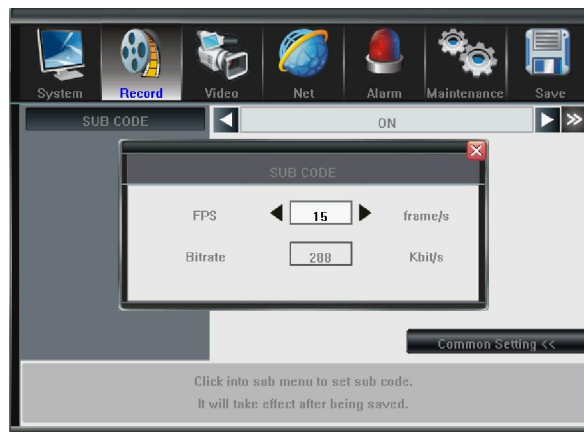


Fig.V1-4: Screen of DVR sub stream settings

2. Installation and running of terminal (mobile phone side) procedure

Versions supported by client side are as follows:

English/Simplified Chinese/Traditional Chinese Client side of Symbian60 3rd Operation System ; English/Traditional Chinese Client side of WinMobile5.0/6.0/6.1 Operation System ;Phone mobile can be supported.

Note: Let's take winmobile6.0 for example to show you how to install and run the procedure.

2.2 Download Mobile phone client side

Enter into mobile phone system and type in P address into E address column in the form of <http://xxx.xxx.xxx.xxx/download.html>. Then press 【Enter】 , the screen shown as the figure V2-1 below will appear. Select the corresponding client side software by using up and down button of mobile phone .



Fig.V2-1 Screen of download mobile phone side software

2.3 After finishing installation , please select QQeye in the start-up menu .

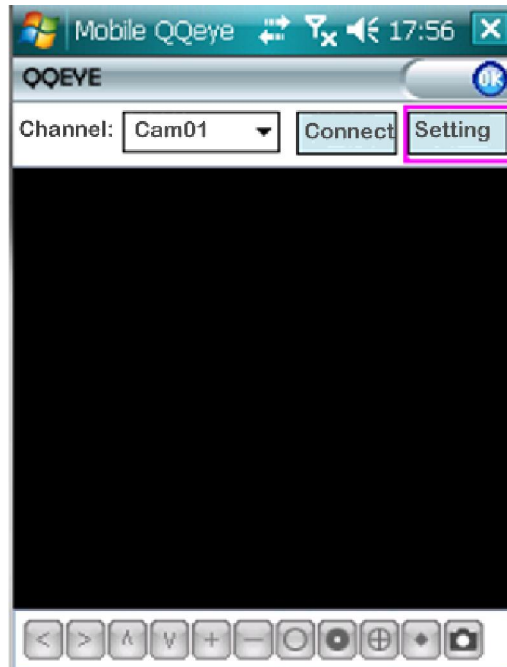


Fig.V2-2 Main screen of mobile phone monitor software

2.4 Click **【 Setting】** on the Fig.V2-2, the fig.V2-3 shown as below will appear.

Type in the right **【 UserName】** and **【 Password】** ,which must be according with the user name and password on DVR side.

Type in the **P** address on **【 Server】** column.

Type in the **【 Port】** for connection such as 7050.

Click **【 OK】** to save and exit the screen.

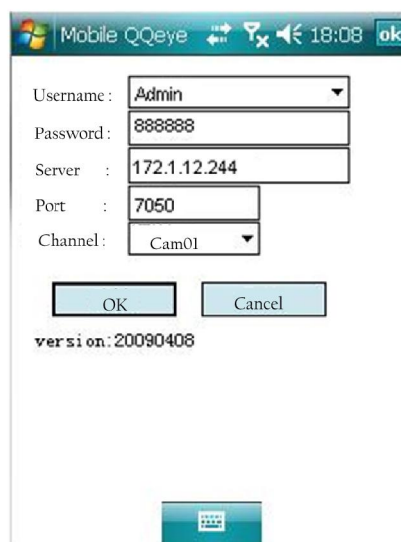


Fig.V2-3 Screen of mobile phone settings

2.5 Click **【 Connect 】** on the Fig.V2-2, the fig.V2-4 shown as the figure below will appear after several seconds of buffer.

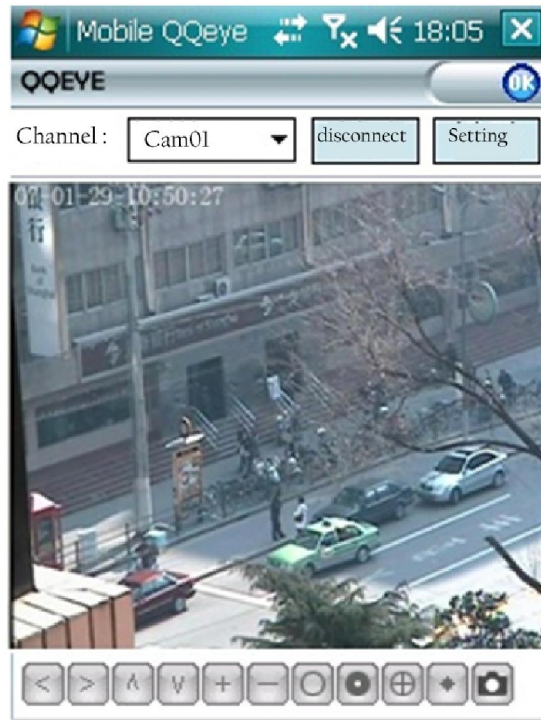


Fig.V2-4 Preview screen of mobile phone

You can select the channel that you want to preview by selecting in the pull-down menu of **【 Channel 】** column Or you can click **【 Disconnect 】** to stop preview .

2.6 Operations

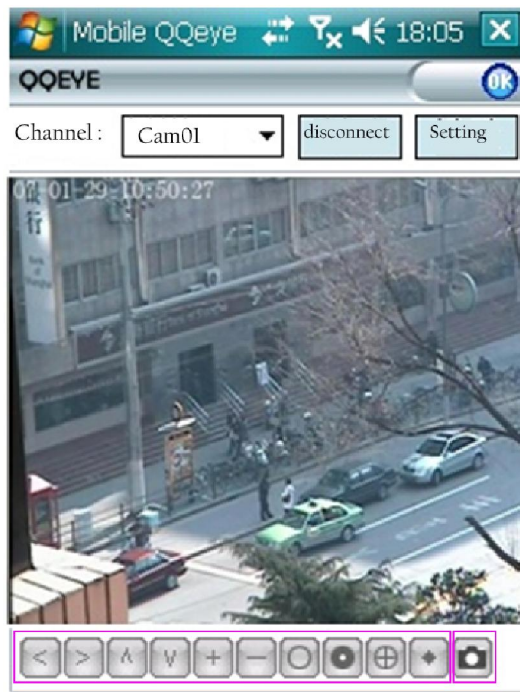



Fig.V2-5 Buttons operation of mobile phone



all of these buttons are operated by PTZ .

From left to right, they are 【 Turn Left】 【 Turn Right】 【 Move Up】 【 Move Down】 【 Zoom out】
 【 Zoom in】 【 Focus far】 【 Focus near】 【 Enlarge Iris 】 【 Narrow down Iris】 .  is for capture picture.

Note: Thanks for using our products. The installation above is take operation system of Windows Mobile for example. There may be some differences between different software versions and operation systems without being noticed.